

# ULTRABlack

DOUBLE WALL STOVE PIPE

## Hi-tech Performance

Double Wall Construction with a 3/8" air space between inner and outer pipes provides superior insulating value to single wall pipe. Better insulating value keeps flue gas temperatures higher. This helps your wood stove perform with an enhanced draft, which provides:

- less chance for moisture or soot build up within the vent
- reduced smoking of the stove at start up
- increased efficiency

ULTRABlack not only keeps the flue temperatures higher, it keeps the outer pipe temperatures cooler. This allows ULTRABlack to be installed with only 6" clearance to combustible materials. Unlike ULTRABlack, single wall stove pipe requires an 18" clearance, which typically means your wood stove sits further away from the wall and takes up valuable space within the room.

## Most attractive double wall product on the market; no unsightly slots or vents.

The outer casing is constructed of satin coat steel. Satin coat is attractive and durable when painted. ULTRABlack is painted with Forrest "Stove Bright" premium quality, high temperature paint to provide a rich appearance that complements your woodstove.



# ULTRABlack

DOUBLE WALL STOVE PIPE

## ULTRABlack No Hassle Lifetime Warranty

We warranty the ULTRABlack chimney connector against burn out when it is used to vent a wood burning stove or free standing fireplace. If any component of your ULTRABlack stove pipe system ever burns out (develops a perforation as a result of use or corrosion), simply return it to any EXCEL dealer for a replacement part at no charge. Sorry, we won't pay any labor to remove or replace the ULTRABlack, and we won't pay the freight between you and the dealer.

### THE FINE PRINT:

You don't need your original bill of sale. You don't need the date of installation. You don't need to show us that the chimney was cleaned regularly (but we do recommend it). You don't need to fill out a warranty card. You don't even need to know our toll-free number. Just bring the ULTRABlack to your local EXCEL dealer and they will give you a new one. Period.

## Construction

**Flue:** .016" stainless steel

**Casing:** .019" satin coat steel. Satin coat is specifically designed to be painted.


**Seam:** Interior and exterior seams are seam welded.

**Wall thickness:** Approximately 3/8"

**Paint:** Forrest "Stove Bright" flat black.

Fits all brands of type A chimney. Fits almost all makes & models of wood stoves.

Fits oval to round.

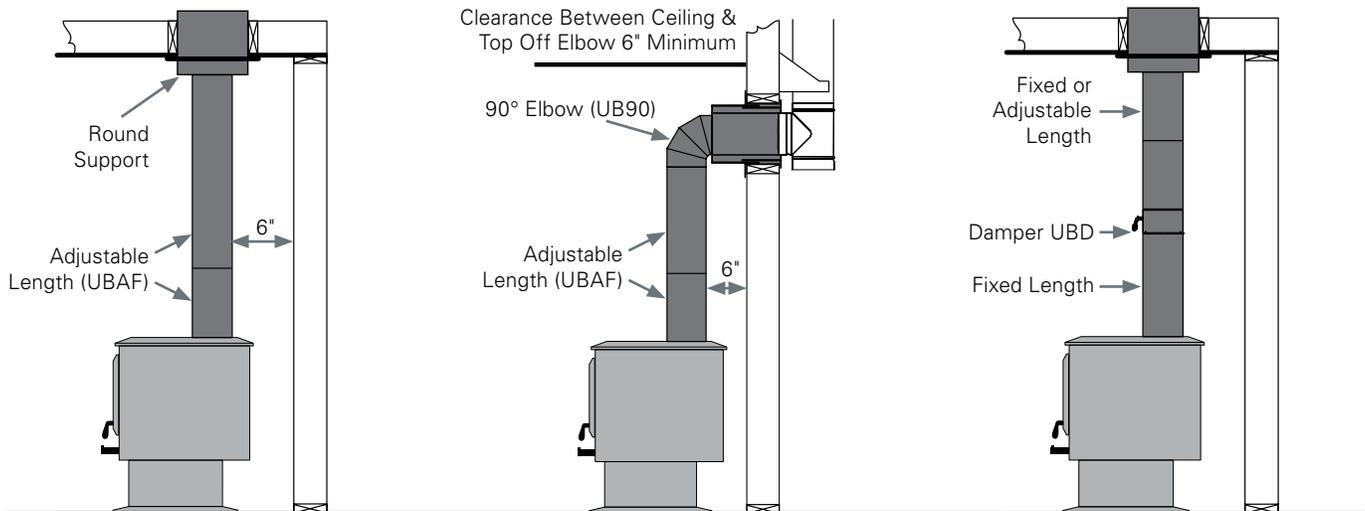

### STRAIGHT UP INSTALLATION

For most straight up installations, the only part required is an adjustable length (UBAF). The UBAF adjusts to allow any overall length from 40" to 68".

### 90° ELBOW INSTALLATION

For most 90° elbow installations, you will only require an elbow (UB90) and an adjustable length (UBAF). If the height from the top of the stove to the top of the elbow is less than 48", you will require a short length plus a slip length (UBSF) for the vertical section of connector instead of the UBAF.

### DAMPER INSTALLATION (UBD)

The damper (UBD) allows you to control the air drawn through your chimney. As such, it controls your stove's combustion. When the handle is in the horizontal position, the damper is closed, creating a restriction in the chimney as far as combustion gases are concerned, and reducing the combustion process inside the stove. (In the close position, the damper is still 20% open so as not to completely block the chimney).